



MERCURY DISPLACEMENT INDUSTRIES, INC.

INDUSTRIAL & ELECTRIC SUPPLY CO.

Phone (956) 541-3743 - Fax (956) 541-2106


(800) 880-3743



INDUSTRIAL CONTROL EQUIPMENT



335NO-120AH-18

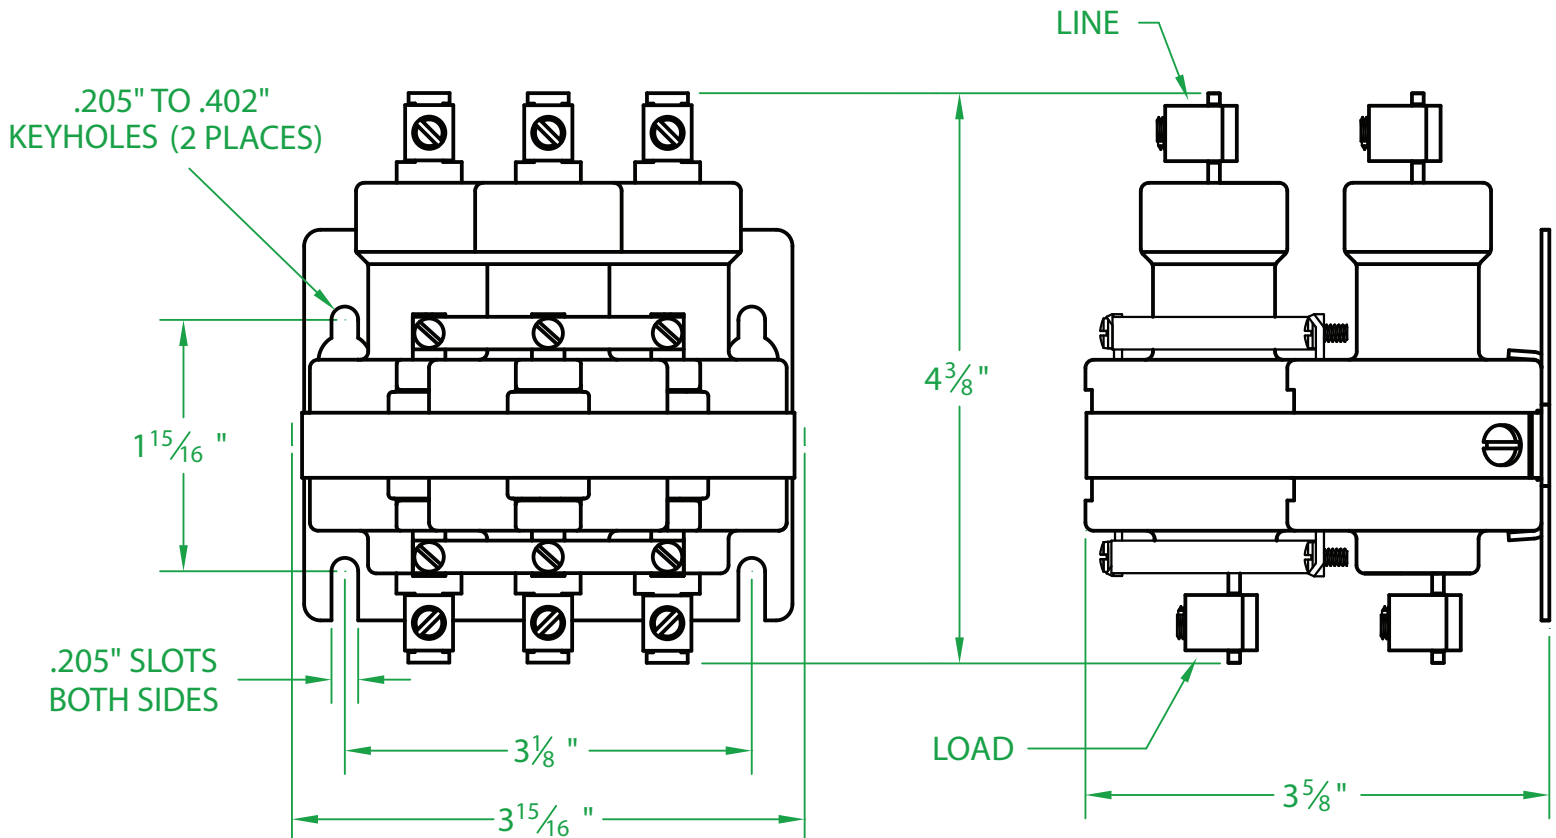

* CONTACT RESISTANCE .003 ohms

* DIELECTRIC WITHSTAND 2,500 VAC RMS

* OPERATE TIME 50 MILLISECONDS

* RELEASE TIME 80 MILLISECONDS

* RATINGS:

CONTACTS: 35 AMPS @ 480 VAC
RESISTIVE OR GEN. PURPOSE
COIL: 120V 50/60 Hz
CURRENT: 159 mA
RESISTANCE: 417 Ω
VA: 19.2 WATTAGE: 10.5

* TEMPERATURE RANGE -35° TO +85° C

* COIL TERMINALS #6 BINDING HEAD SCREWS
TORQUE TO 7 IN-LB

* LOAD TERMINALS 4-14 A.W.G. COMPRESSION
TYPE TORQUE TO 31.5 IN-LB

* SNAP TRACK™ MOUNTING & A STEEL STRAP

* 3 POLE / SINGLE THROW

* MAGNETICALLY ACTIVATED

* MERCURY CONTACTOR

* LIFE CYCLE ENDURANCE TESTS: U.L. 508 @ 100,00 & CSA 22.2 @ 250,000 CYCLES

Contactors - Relays - Switches

J.J.S. 09-14-09

<http://www.mrocrib.com>