




MERCURY DISPLACEMENT INDUSTRIES, INC.

INDUSTRIAL & ELECTRIC SUPPLY CO.
Phone (956) 541-3743 - Fax (956) 541-2106
(800) 880-3743

60NO-120AH



INDUSTRIAL CONTROL EQUIPMENT

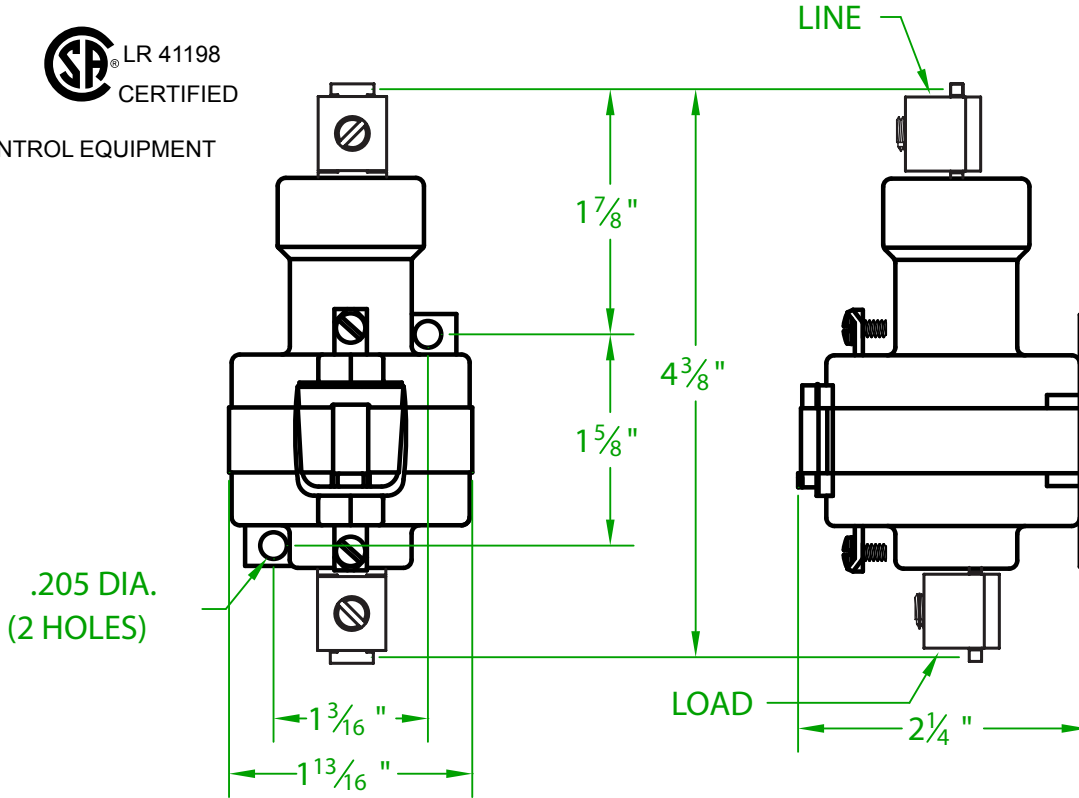

* CONTACT RESISTANCE .002] 00 ohms

* DIELECTRIC WITHSTAND 2,500 VAC RMS

* OPERATE TIME 50 MILLISECONDS

* RELEASE TIME 80 MILLISECONDS

* RATINGS:

CONTACTS: 60 AMP @ 480 VAC

RESISTIVE OR GEN. PUPOSE

COIL: 120V 50/60 Hz

CURRENT: 48 mA

RESISTANCE: 1,250 Ω

VA: 5.8 WATTAGE: 2.9

* TEMPERATURE RANGE -35° TO +85° C

* COIL TERMINALS #6 BINDING HEAD SCREWS TORQUE TO 7 IN-LB

* LOAD TERMINALS 2-8 A.W.G. COMPRESSION TYPE TORQUE TO 45 IN-LB

* SINGLE POLE / SINGLE THROW

* MAGNETICALLY ACTIVATED

* MERCURY CONTACTOR

* LIFE CYCLE ENDURANCE TESTS: U.L. 508 @ 100,00 & CSA 22.2 @ 250,000 CYCLES

Contactors - Relays - Switches

J.J.S. 12-13-10

<http://www.mrocrib.com>