




**MERCURY DISPLACEMENT INDUSTRIES, INC.**  
INDUSTRIAL & ELECTRIC SUPPLY CO.  
Phone (956) 541-3743 - Fax (956) 541-2106  
(800) 880-3743

# 2100NO-24D

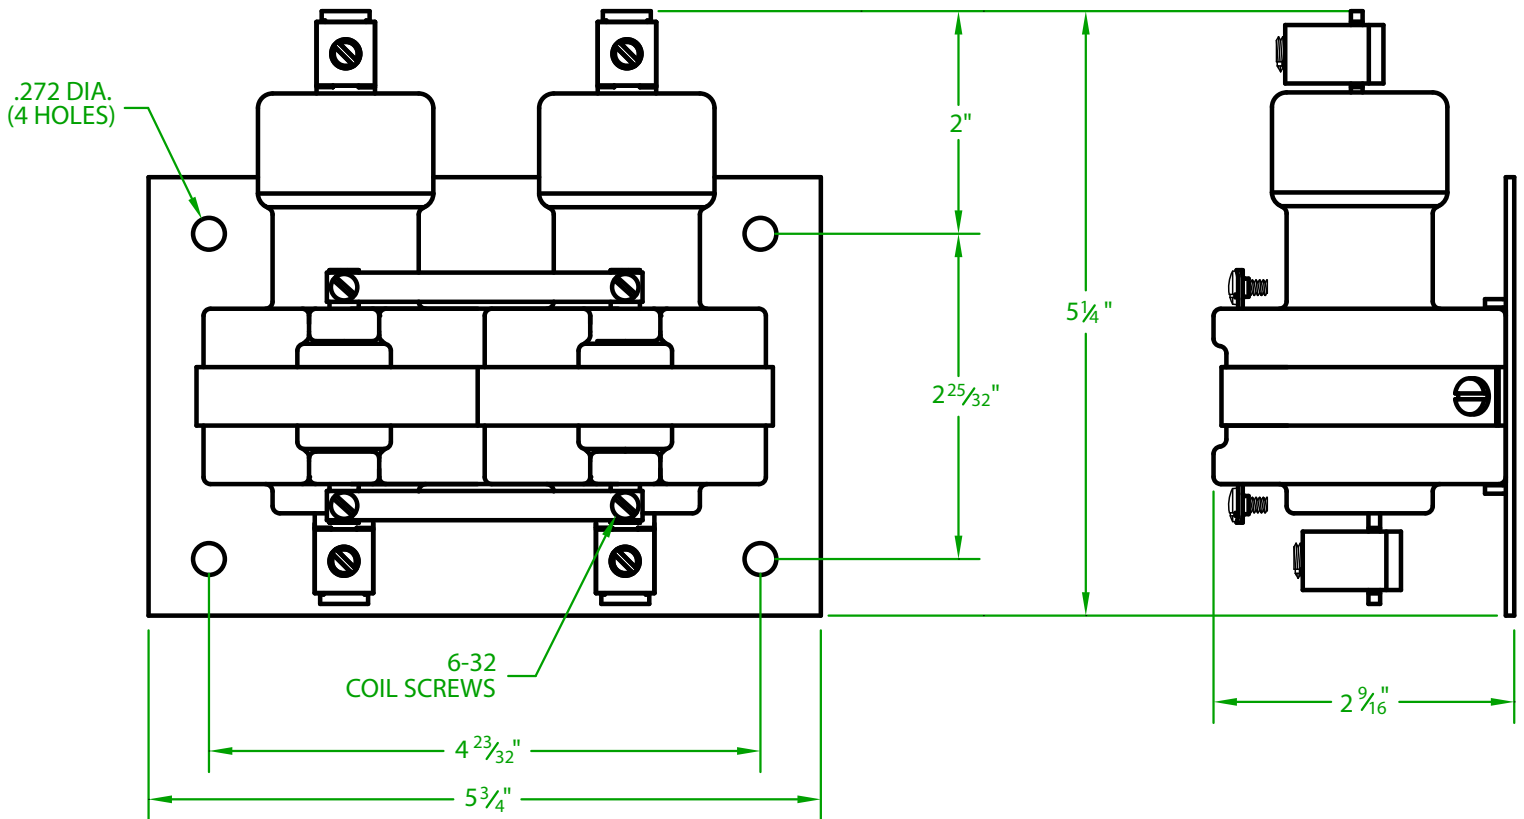

- \* CONTACT RESISTANCE .001 ohms
- \* DIELECTRIC WITHSTAND 2,500 VAC RMS
- \* OPERATE TIME 45 MILLISECONDS
- \* RELEASE TIME 60 MILLISECONDS
- \* RATINGS:
  - CONTACTS: 100 AMPS @ 240 VAC
  - 80 AMPS @ 480 VAC
  - COIL: 24 V.D.C. CURRENT: 738 mA
  - RESISTANCE: 32.5  $\Omega$  VA: 17.8
  - WATTAGE: 17.8 RESISTIVE

- \* TEMPERATURE RANGE -35° TO +85° C
- \* COIL TERMINALS #6 BINDING HEAD SCREWS TORQUE TO 7 IN-LB
- \* LOAD TERMINALS 2-8 A.W.G. COMPRESSION TYPE TORQUE TO 45 IN-LB
- \* 2 POLE / SINGLE THROW
- \* MAGNETICALLY ACTIVATED
- \* MERCURY CONTACTOR